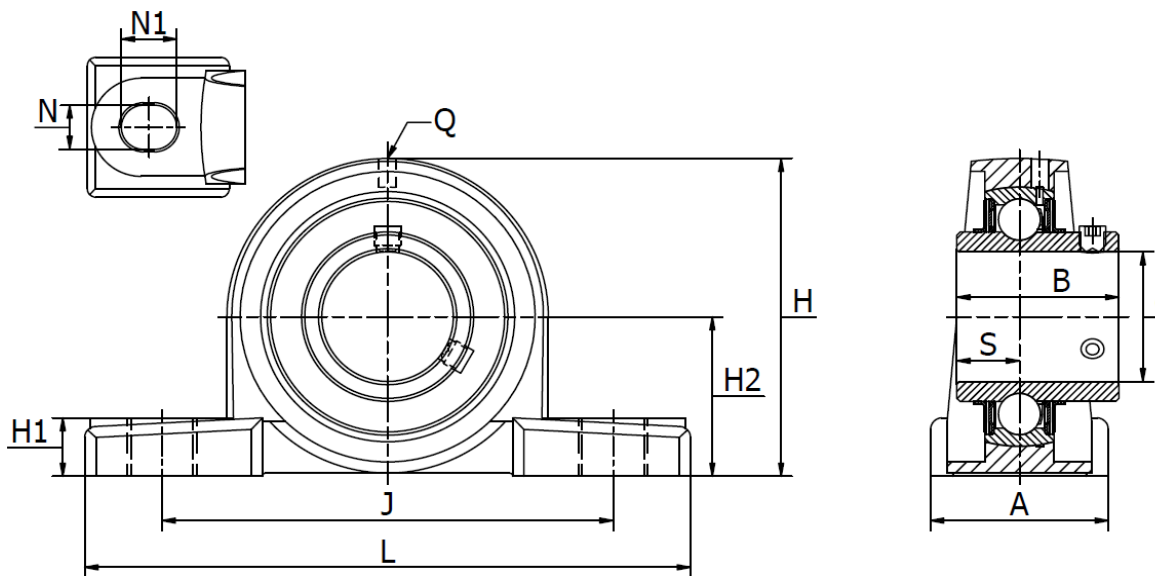




UCP 200 PPSS Series (SUCTP 200 / RASEY-TV-VA)

Thermoplastic pillow block housings, FDA & NSF approved grease. Stainless steel normal duty bearing, set screw locking.



Product No.	d	Dimensions (mm)											Bolt size	Bearing No.	Housing No.	Optional covers		Weight (kg)
	mm	H ₂	L	J	A	N	N ₁	H ₁	H	S	B	Q				Closed	Open	
UCP 204 PPSS (SUCTP204)	20	33,3	127	96	37	11	14	14	63,8	12,7	31,0	M6	M10	UC 204 SS	TP204	EC204	EC204 OP	0,30
UCP 205 PPSS (SUCTP205)	25	36,5	140	105	38	11	14	15	69,5	14,3	34,0	M6	M10	UC 205 SS	TP205	EC205	EC205 OP	0,40
UCP 206 PPSS (SUCTP206)	30	42,9	160	121	44	15	18	16	82,0	15,9	38,1	M6	M12	UC 206 SS	TP206	EC206	EC206 OP	0,70
UCP 207 PPSS (SUCTP207)	35	47,6	167	126	48	15	18	17	92,0	17,5	42,9	M6	M12	UC 207 SS	TP207	EC207	EC207 OP	0,90
UCP 208 PPSS (SUCTP208)	40	49,2	180	136	52	15	18	18	98,0	19,0	49,2	M6	M12	UC 208 SS	TP208	EC208	EC208 OP	1,10
UCP 210 PPSS (SUCTP210)	50	57,2	204	159	57	19	22	21	112,2	19,0	51,6	M6	M16	UC 210 SS	TP210	EC210	EC210 OP	1,50

Materials:

Housing: PBT (polybutylene terephthalate), solid base.

Operating temperatures: -20°C to +120°C

Grease nipple: AISI 304 Stainless

Grease: Mobil FM 222 Food Grade FDA & NSF approved

Mounting bolt bushing: AISI 304 Stainless

Bearing Inserts:

Inner & outer races, balls: AISI 420-440 Stainless

Cage: AISI 302 Stainless

Seals: Rubber & AISI 302 Stainless




Set screws: AISI 420 Stainless

See next page for breaking loads



UCP 200 PPSS Series (SUCTP 200 / RASEY-TV-VA)

Thermoplastic pillow block housings, FDA & NSF approved grease. Stainless steel normal duty bearing, set screw locking.

Breaking Point Test (kgs)							
Mode of load	204	205	206	207	208	209	210
	8800	13700	12650	12750	13100	13360	13850
	7700	10000	10600	10800	11100	11400	11750
	5000	8100	5750	7500	8500	8950	9550